

Celstran® LFT structural components

Technological leap in Celstran® LFT and MuCell® technology

Celstran® LFT in the MuCell® process:

- + Weight reduction
- + Lower warpage, even of large structural components
- + Material saving

Now new:

Further warpage optimization coupled with higher impact strength through

- + New screw design and
- + Optimized process parameters



The very good material properties of Celstran® LFT can now be exploited even more successfully in components produced by the MuCell® process. This is ensured through a new screw design developed in partnership with Trexel, Inc. and processing parameters specially optimized to the MuCell® process.

Large lightweight moldings and structural profiles can now be produced from Celstran LFT with virtually no warpage.

MuCell® technology with Celstran® LFT


Microcellular foam plastics can be produced by mechanical or chemical dispersion of a gas, normally carbon dioxide or nitrogen, in the polymer melt. Nucleation and expansion of the gas bubbles as the mold cavity is filled create a closed-cell microfoam, so enabling lightweight components.

Unlike with conventional short-fiber-reinforced materials, in Celstran® LFT, the long fibers mechanically interact with each other in the molded component. They form a glass fiber framework that restricts anisotropic shrinkage and significantly reduces warpage. This

property profile makes Celstran® ideally suitable for use in structural components with high mechanical property requirements.

As a result of the newly developed screw design and optimized processing parameters, the long fibers in Celstran® LFT can now be processed much more gently in the MuCell® process. The result is a significant improvement in component properties and new opportunities for designers and injection molders to create large structural components virtually warpage-free, while saving weight at the same time.

Comparison between the standard and new screw

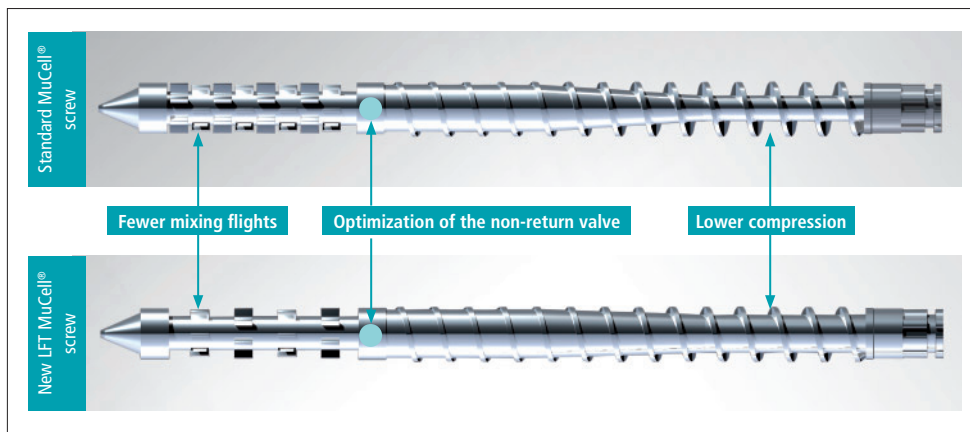

Comparison of properties obtained in the MuCell® process with conventional and optimized parameters

	unit	MuCell® traditional parameters		MuCell® optimized parameters		improvement	
		standard screw		LGF screw			
		Celstran® PP GF40 - 04	Celstran® PP GF50 - 04	Celstran® PP GF40 - 04	Celstran® PP GF50 - 04	Celstran® PP GF40 - 04	Celstran® PP GF50 - 04
Drop impact ASTM 3763	[J]	8.91	9.69	11.02	13.86	24%	43%
Notched impact ASTM D256	[J/m]	125	3.52	136	3.97	9%	13%
Tensile strength ASTM D638	[MPa]	79.5	179.6	87.4	195.4	10%	9%

Ticona and MuCell® technology:

As a Trexel licensee, Ticona has been investing considerable effort in the physical microfoam injection molding process (MuCell®) for some years now and was one of the first polymer producers to do so. Now, Ticona operates its own MuCell® plant in its Plastics Technical Center and has acquired a wealth of experience in this technology.

Suitable Ticona plastics for the MuCell® process:

- Celanex® PBT
- Hostaform® POM
- Fortron® PPS
- Celstran® LFT

www.ticona.com · infoservice@ticona.de · Phone +49 (0)69 3051 6299 · Phone +49 (0)180 584 2662* (Germany)

NOTES FOR USERS: The information contained in this publication should not be construed as an agreement or guarantee regarding certain properties of our products. It is the sole responsibility of the user to determine the suitability of a particular material and component design for a specific application. We strongly recommend the user to obtain the latest manufacturers' instructions on the use of the selected materials and to follow these. Any existing industrial property rights must be observed. Except where otherwise noted, all registered trademarks are owned by Ticona or its affiliates.

* 0,14 € / minute + local landline rates